

# HWg-WLD

## Ethernet-enabled water flood detector



The HWg-WLD detects water leaks or floods along the entire length of the sensing rope cable.


The moisture-absorbing sensing cable can be up to 85m long and it can be extended with a regular cable (100m).

The WLD cable detects even a small volume of water, ethylene glycol, or other conductive liquid.

After flooding, the cable can be dried and reused.

HWg-WLD features a built-in web server and SNMP support. In case of an alarm, the device sends a SNMP trap, e-mail and/or SMS (through SMS GW).

Leaks can also activate a remote network-enabled relay (Box-2-Box mode against a Poseidon or Damocles unit).

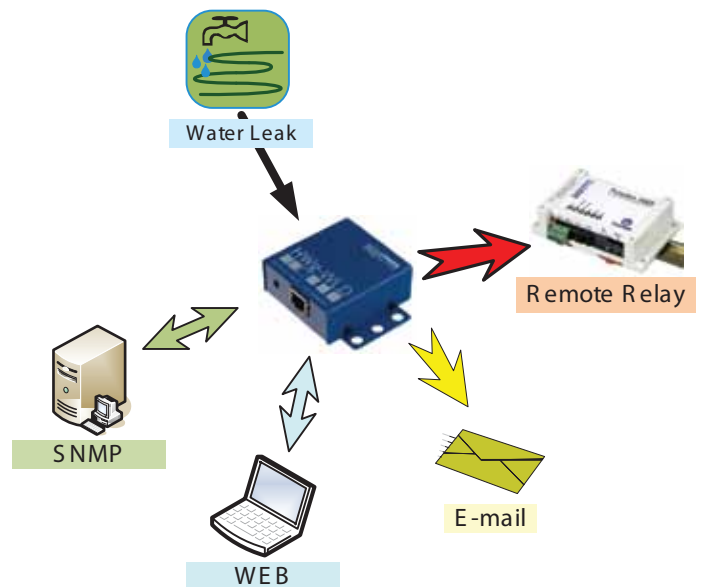

## Applications

- Water detection under raised floors
- Leaky pipe detection (cable wrapped along the pipe)
- Protection against floods from roof lights – sensing cable routed along the walls
- Detection of water leaks in drip trays
- Detection of water leaks under air-conditioning outlets

- ✓ Up to 85m water sensing rope cable
- ✓ Up to 100m prolong cable
- ✓ PoE version available
- ✓ Web server
- ✓ SNMP, E-mail alarms
- ✓ SMS GW support

## Basic features

- Simple installation, supports DHCP
- No software necessary, built-in web server
- The WLD (Water Leak Detection) sensing cable (up to 85m) can be extended with a two-wire extension cable (up to 100m) at several places.
- The sensing cable can be fixed using clips or adhesive tape.
- HWg-WLD signals the following states:
  - 0 = OK
  - 1 = Sensing cable flooded
  - 2 = Sensing cable disconnected
- Water leak alarms can be sent by standard e-mail.
- Water leak alarms can be sent as text messages (SMS) using a SMS GW in the network (e.g. Poseidon 4002).
- Detected leaks or WLD cable disconnections can be signaled by activating a relay output at a Poseidon or Damocles unit over the Ethernet. Poseidon 3468 (two relay outputs) can signal leaks detected by two HWg-WLD devices.
- The HWg-WLD can be mounted on a wall or inside a 19" cabinet.
- The HWg-WLD PoE version can be powered over the Ethernet cable (IEEE 802.3af) or with a power adapter.

## HWg-WLD

<b>Input</b> (sensing cable)	1
Max. sensing cable length	85m
Max. leader cable length	100m
<b>Outputs</b> (relay contacts)	—
Remote relay support	✓
<b>SNMP, SNMP Trap</b>	✓
<b>Alarm alerts by e-mail</b>	✓

## Parameters

<b>Ethernet</b>	10/100 Mbit
<b>IP protocols</b>	ARP, TCP/IP (HTTP, NTP, SMTP) UDP/IP (SNMP)
<b>DHCP for IP assignment</b>	✓
<b>SNMP</b>	Port 161, 162
<b>M2M protocols</b>	XML (http), SNMP
<b>Power</b>	
<b>HWg-STE</b>	5V / 1W
<b>HWg-STE PoE</b>	IEEE 802.3af + 5V/1W

## Accessories



J-clips 10 for WLD cable



Poseidon 3468



Water leak extension 2 m



WLD A prolong cable 5 m

### HWg-WLD Water detector

HWg-WLD ethernet Water Leak Detector. Complete package with a power adapter, CD, 2m prolong cable + 0.4m sensing rope cable.

### HWg-WLD PoE

HWg-WLD PoE – Water leak detector with PoE (IEEE 802.3af) capability. Complete package with a power adapter, CD, 2m prolong cable + 0.4m sensing rope cable.

### HWg-WLD Relay

Water Leak Detector with a relay output. Complete package with a power adapter, 2m prolong cable + 2m water sensing rope cable. Can be connected to Poseidon as the 1-Wire UNI sensor.

### J-clips 10 for WLD cable

Set of 10 clips for fixing the WLD sensing cable.

### WLD sensing cable A - 2+2m

Water Leak Detection cable type A. Total length is 4m: 2m prolong cable + 2m sensing rope cable, terminated.

### WLD sensing cable A - 2+10m

Water Leak Detection cable type A. Total length is 12m: 2m prolong cable + 10m sensing rope cable, terminated.

### WLD A prolong cable 5 m

5m extension for the WLD sensing cable.

### Damocles 1208

Damocles 1208 – 8 outputs can be used to signal water leaks or floods

### Poseidon 3468

Poseidon 3468 – 2 relays (110/230VAC) can be used to signal water leaks or floods.